

FIP-15RSS

15" Stainless Full IP66 (Intel 6th Gen. Skylake Core i7 Platform Inside)



Features:

- Intel 6th Generation Skylake Core i7 Processor
- Either 5-Wire Resistive Or P-Cap Touch Screen
- -10~55°C Wide Range Operating Temperature
- Anti-Corrosion Stainless Housing Design
- Full-IP66 Protection
- High Brightness: 1000 nits for optional
- Round Edge

Specification

System:

- CPU : Intel® Skylake 6th Gen. Core i7-6600U 2.6Ghz (Max. up to 2.7Ghz)
- Chipset : SoC integrated
- Memory : DDR3 1600 MHz SO-DIMM, Default 4GB (Max. 16GB)
- Storage : 1x SSD, Default 64GB, 2.5" HDD for optional
- Ethernet : Intel® Ethernet Controller I210-AT + Intel® Gigabit Ethernet PHY I219
- BIOS : AMI UEFI Flash

Input / Output :

- Serial Ports : 2 x RS232 (IP66)
- USB Ports : 2 x USB (IP66)
- Ethernet : 2 x RJ45 GbE LAN (IP66)
- Power : AC 110~240V, Universal, ±10% (IP66)

Power Specification :

- Power Adapter : No power adapter
- Power Consumption : 60 W (typ.)

Panel Specification :

- Size/ Type : 15" TFT LCD
- Resolution : 1024 x 768
- Brightness : 250 (cd/m²)
- Contract Ratio : 500 : 1 (typ.)
- Viewing Angle : -70~70 (H) ; -60~60 (V)
- Max. Colors : 16.2M (6bits+ FRC)
- Touch : 5- wire resistive touch screen (default)



Environment Tolerance:

- Operating Temperature : -10 deg. C to 55 deg. C
- Operating Humidity : 10% to 95% (Non Condensing)
- IP Grade : Full- IP66

Order Options :

- OS : Windows 10 IOT Enterprise (Optional)
- High Brightness : 1,000 cd/m² (Optional)
- Touch Screen : P-cap touch (Optional)
- Wireless : WiFi 802.11 b/g/n 2x2 (Optional)
- Custom I/O port : By request

Drawings:

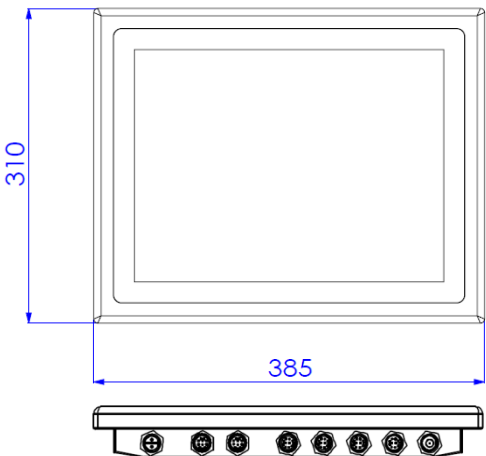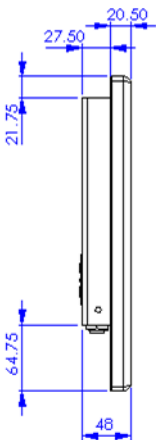

4-M4 VESA

