

LCH-15W-SDI

15.6" HD-SDI Monitor




Specification

System:	
• HD-SDI	: HD-SDI Input
• Glass	: AR Glass w/optical bonded to the panel, w/EMI filter (Optional)
• Brightness Control	: Front keypad brightness control (0~100%)
• PIP/PNP	: PIP / PNP OSD selection
• Power Input	: 12V DC Input power
• Mounting Type	: 75x75, 100x100 VESA Mount

Input/ Output :	
• HD-SDI	: 1 x HD-SDI Input (BNC Type)
• VGA	: 1 x VGA (D-sub 15-pin)
• Video	: 1 x Video , PAL/NTSC (Optional)
• USB	: 1 x USB for touch screen
• Power	: 1 x DC 12V Input
• DVI	: 1 x DVI-D (optional)

OSD :	
• OSD Input	: 5-key OSD buttons
• OSD Function	: Color, Position, Auto-adjustment, Factory Settings

Drawings

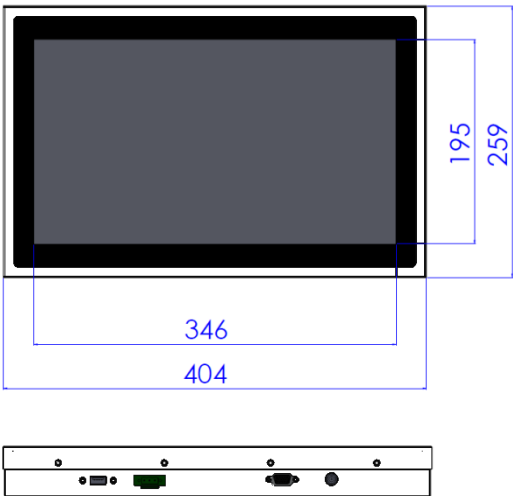

Features:

- HD- SDI Input monitor
- Full-HD resolution
- Slim design
- Operating Temperature -10°C to 55°C

Panel Specification :	
• Size/ Type	: 15.6" (16:9) LED backlight
• Active Area (mm)	: 344 (H) x 194 (V)
• Pixel Pitch (mm)	: 0.3 (H)x 0.3 (V)
• Resolution	: 1920 x 1080 @ 60Hz
• Contrast Ratio	: 500 : 1 (typ.)
• Max. Colors	: 262K colors(6 bits)
• Brightness	: 400 nits (cd/m ²)
• Viewing Angle	: -70 ~ 70 (H); -60 ~ 60 (V)
• Touch Screen	: P-cap multi touch screen (Optional)

Dimensions:	
• Dimensions	: 396 x 245 x 46 mm (roughly)
• Weight	: ~ 2.5 KG

Accessory:	
• Power Cord	: 1 x Power Cord
• Power Adapter	: 1 x AC to DC Power Adapter
• Cable	: 1 x USB cable for touch screen

Environment Tolerance:	
• Operating Temperature	: -10 deg. C to 55 deg. C
• Storage Temperature	: -30 deg. C to 70 deg. C
• Humidity	: 5 to 95% (Non Condensing)
• IP Level	: Front IP65

